





13x 120 (daily program)

Highlights

- Easy programming with captive setting keys
- Easy to read switching program
- Analogue display (clock hands)
- Manual override switch "Permanent OFF / Automatic / Permanent ON"
- Simple to install

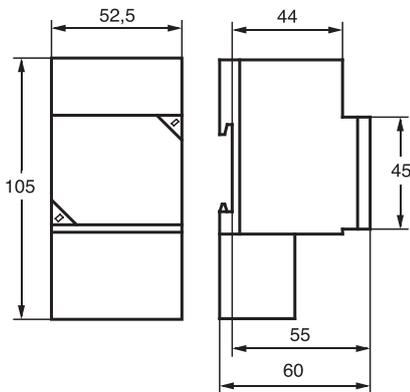

131 x20 / 134 x20



- Daily or weekly program
- Slim format 52.5 mm
- Captive setting keys
- Manual override switch "Permanent OFF / Automatic / Permanent ON"
- Analogue display (clock display)

Save time

switching controlling counting

Analogue time switches 131 x20 / 134 x20

for DIN-rail and wall mounting

[müller VS 3x.x8]

Technical data

Supply voltages	230 V, 50–60 Hz other voltages on request
Power consumption (real power)	0.4 W
Switch (potential-free)	Change-over, contact gap < 3 mm (µ)
Contact material	AgSnO ₂
Switching capacity	16 A / 250 V~ at cosφ=1 2.5 A with inductive load cosφ=0.6 max. filament lamp load 2,000 W
Min. switching power	1,000 mW (10 V / 10 mA)
Filament Lamp, Halogen Lamp	2,000 W
Fluorescent Lamp uncompensated	1,000 W
Fluorescent Lamp series compensated	750 W
LED (230 V~) / CFL	200 W
Minimum switching interval	13x 120 day dial 30 min. 13x 420 week dial 2 h.
Time base	Quartz
Accuracy (at 23°C)	≤ ±1 sec./day
Power back-up (at 20°C)	approx. 100 h.
Permitted ambient temperature	-5°...+50°C
Housing	self-extinguishing thermoplastic
Dimensions	45 x 52.5 x 55 mm
Mounting	35 mm DIN-rail and wall
Type of connection	Screw terminals
Type of protection	IP 20 to DIN EN 60529
Class of protection	II when installed according to regulations
Mode of operation (DIN EN 60730-1)	1 BSTU
Degree of contamination (DIN EN 60730-1)	2
Rated surge voltage (DIN EN 60730-1)	4 kV

Order number	Version
paladin 131 120	müller VS 30.18 Day without reserve
paladin 134 120	müller VS 34.18 Day with reserve
paladin 131 420	müller VS 30.38 Week without reserve
paladin 134 420	müller VS 34.38 Week with reserve

▣ Housing colour ▣ Setting key colour